



VIDHI TRADELINKS

We Deal in : All Type of Packaging Machines & Material

Packaging Machines & Material



Packaging Machines & Material

www.vidhitradelinks.com

Semi Automatic Strapping Machines



306



PW-316H (Heavy Duty)

ONE TOUCH & EASY OPERATION : Turn the power on and you are ready to strap your packages. Motor stops automatically when not in use within preset 60 seconds to save energy and prolong motor life.

ADVANCED P.C.B. CONTROL SYSTEM : New Easy-to-Replace printed circuit board (P C B), Controls feeding, tensioning, welding, sealing, cooling of strap welds as well as other functions of the machine for trouble-free and low-operations.

Packway Taiwan Made	306	PW-316H (Heavy Duty)
Power supply	1Ø , 220V, 50HZ	1Ø , 220V, 50HZ
Power Consumption	0.4KW	0.4KW
Driving Motor	1/4HP, 220V, 200W	1/4HP, 220V, 200W
Strap width	5 - 15 mm	6 - 15 mm
Strapping Speed	2.5 sec./strap	1.5 sec./strap
Min. package size	60mm	60mm
Weight	100 kg.	100 kg.
Tension	5 - 50 kg.	15 - 55 kg.
Dimension (L x W x H)	895 x 565 x 730	910 x 580 x 730

Robust construction with feather touch controls

Recommended for following Segments :

- Corrugation Industries • Airports • Ceramics • Newspapers
- Edible Oil • White Goods etc.

Fully Automatic Strapping Machines



PW-0860C



PW-0860AS2R
(Top Roller Driven)

We Supplies Fully Automatic Strapping, Taping, Palletising line as per Customers Requirement

Model	PW-0860C	PW-0860AS2R (Top Roller Driven)
Power supply	3 Phase, 220 / 380 / 440v, 50 / 60hz	
Strap width	9, 12, 15, 19mm	
Tension adjustment	Adjustable (Max. over 90kg.)	
Speed	2.4sec. / per cycle	
Max. package size	W850 x H600 mm	
Power consumption	850w	1250w
Min. package size (L x W x H)	W100 x H50 (mm)	500 x 400 x 50 (mm)
Dimension (L x W x H)	1440 x 640 x 1517 (mm)	1645 x 760 x 1535 (mm)
Net weight	250 kgs.	330 kgs.
Gross Weight	300 kgs.	390 kgs.
Shipping size	1480 x 700 x 1700 (mm)	1660 x 850 x 1700 (mm)

Features :

PW-0860C

- New modular aluminum Arch with convenient add on Systems to change height
- High adjustable strap tension of over 90 kgs.
- Easy loading or unloading of strapping

PW-0860AS2R (Top Roller Driven)

- Table top can be easily opened for easy maintenance.
- The position of strapping can be adjusted by moving the location of sensors.
- Two types : one is top roller driven & the other is top belt driven.
- Top selling TAIWANESE model in India for the last 10 years.

PP Strap



We are Trading in straps available in different widths and colors listed below, through most sophisticated, Hi-Tech imported fully automatic plant and machinery.

Available Width :	6mm, 8mm, 9mm, 11mm, 12mm, 15mm, 18mm
Standard Colors :	Transparent, White, Golden Yellow, Lemmon Yellow, Red, Blue, Green, etc.
Printing Facility :	It is available as per requirements of quality, sizes & available range of colors.
Customization :	It is also entertained with specific requirement.


Facilities :

- PP straps find wide applications in Ceramic Products, Electronic Appliances, Electrical Goods, News Papers, Medicines, Automobile Industries, Glass Products, Plain and Corrugated Sheets and so many industries.
- Manufactured as per ASTM D 3950 Standards
- Available in various widths & colors
- Manufactured from Hi-Tech Fully Automatic Plant
- Nearly 'ZERO' curvature
- Nearly 'ZERO' deviation from specification
- Rotogravure printing technology to obtain sharp printing results

Standard Specification

Item Code	Width (+0.0/-0.5mm)	Thickness (+0.0/-0.4mm)	Avg. Weight Per Roll (+/-50gms.)	Avg. Length Per Roll (+/-5% in Mtrs.)	Avg. Break Load (in Kgs.)
SA 905	9.00	0.50	5.00	2000	65-70
FA 906	9.00	0.60	6.00	2000	75-80
SA 1105	11.00	0.50	6.00	2000	80-85
FA 1106	11.00	0.60	7.00	2000	90-95
SA 1205	12.00	0.50	7.00	2000	90-95
FA 1206	12.00	0.60	8.00	2000	105-110
SA 1505	15.00	0.50	5.00	1000	125-130
FA 1506	15.00	0.60	6.00	1000	130-135
FA 1507	15.00	0.70	7.00	1000	145-150
FA 1508	15.00	0.80	8.00	1000	155-160
SA 1805	18.00	0.50	6.00	1000	160-165
SA 1806	18.00	0.60	7.00	1000	165-170
SA 1807	18.00	0.70	8.00	1000	170-175
SA 1808	18.00	0.80	9.00	1000	175-180

PET Strap

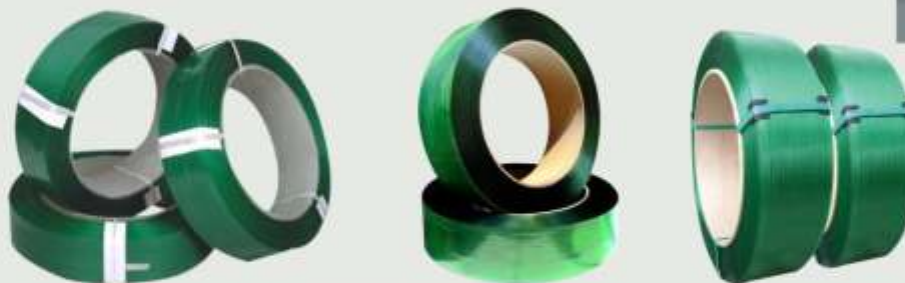

Standard Specification

Width		Thickness		Length (M)	Weight (Kg.)	Tensile (kg.f)	Elogantion (%)
mm	Inch	mm	Inch				
9	0.35	0.60	0.024	4000	25.0	200†	13†
10	0.39	0.55	0.022	2300	20.0	250†	
12	0.47	0.55	0.022	2000	20.0	300†	
16	0.63	0.80	0.031	1100	20.0	500†	17†
19	0.75	1.00	0.039	750	20.0	800†	
25	0.98	1.10	0.039	600	20.0	1000†	
32	1.26	1.10	0.043	500	20.0	1300†	

BOPP Tape



BOPP Self Adhesive Packaging Tape Dimensions :

Width Available in mm	Length Available in mtrs	Thickness Available in Microns
9, 12, 24, 30, 36, 48, 60, 72, 96, 144, 288 etc.	40, 50, 65, 650, 1000 etc.	36, 38, 40, 45, 50, 55, 60 etc.

Colours : Brown, Transparent, Milky White, Red, Blue, Yellow, Green
Other dimensions and colours available at customer's request.

Cord Strap



Plastic Strapping Tools



Pneumatic Strapping Tools

Standard Specification

PST 19 High Tension	3500 N
Strap Width	12mm, 15mm and 19mm
Strap Thickness	0.6mm up to 1.5mm
Tool Weight	3.8Kg



Battery Powered Strapping Tools

Standard Specification

Model No	ZP 22/ZP 26
Tensioning Sealing and Cutting all in one.	
ZP 22 Standard Tension	2500 N
ZP 26 High Tension	3500 N
Strap Width	12, 15 and 19 mm.
Brushless Motor and Smart ECS.	



VIDHI TRADELINKS

SF-14, 3rd Floor, Shreemad Bhavan, Off. Dhebar Road, Rajkot-360 002. (Gujarat) INDIA.

Ph.: 090166 46123

Cell: 099240 21428 | 076980 83028

E-mail: info@vidhitradelinks.com

Web.: www.vidhitradelinks.com

*All Specification subject to change without notice.

Dealer :